


NOTES:

- SEAKEEPER 20040, MOTOR DRIVE JUNCTION BOX.**
- SPECIFICATIONS**
 Power Required: 185-240 VAC, 1 Phase, 50/60 Hz, 20 Amps
 Ambient Air Temperature: 0 to 50 degC
 Cooling: Liquid cooled, 3/8 inch tubing
 Weight: 35 lbs (15.9 Kg)
 Ingress Protection: IP 66
- MOUNTING INSTRUCTIONS**
 Bulkhead space required: Approx. 19 W x 31 H inches (483 x 787 mm).
 Hardware required: Four mounting screws through two mounting brackets to primary vessel structure at four corners. (Screws 1/4-20x1.0, M6x25, or equivalent).
 Location: Optimal for cables and tubing.
 Orientation: Not critical.

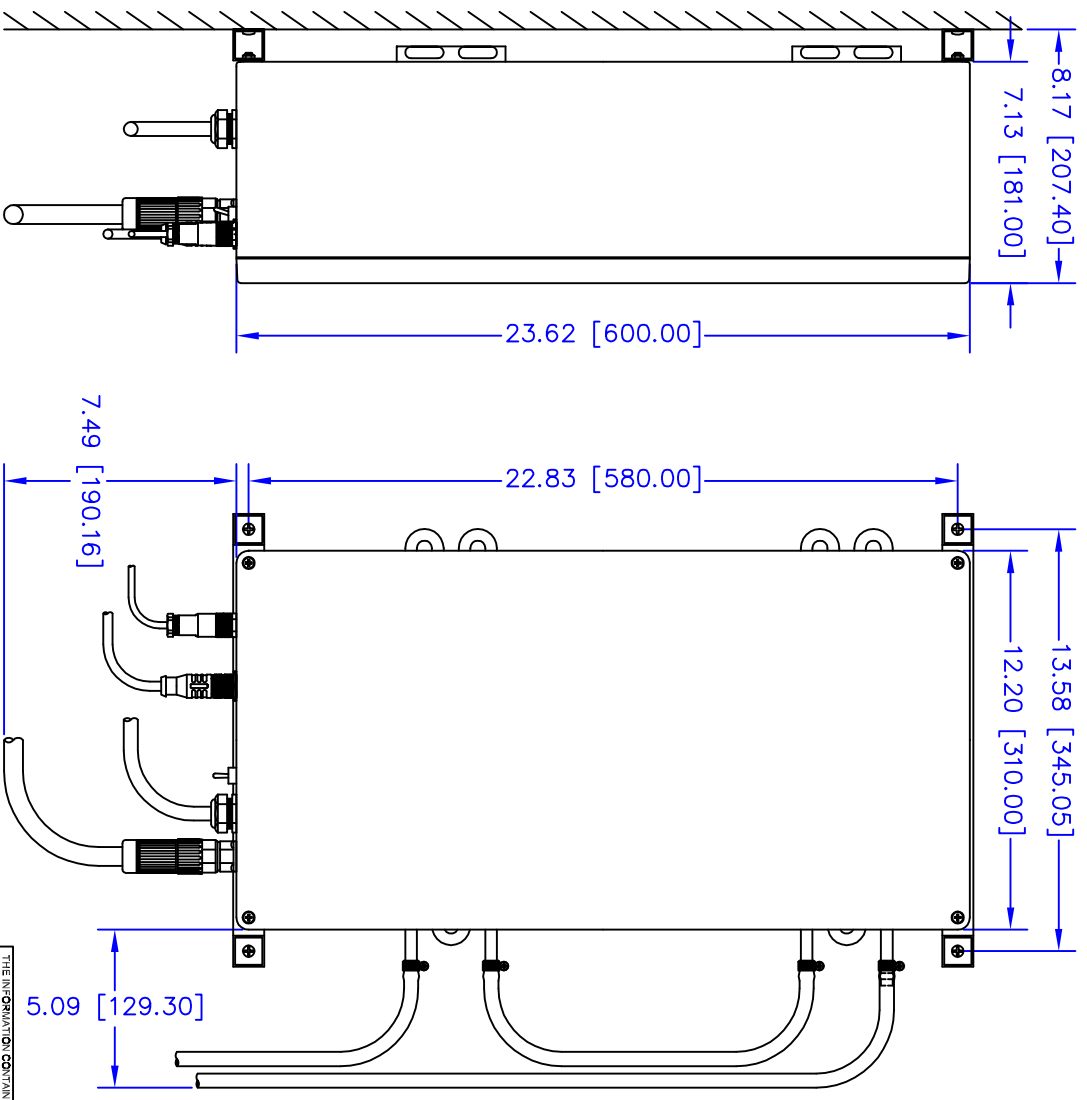

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SEAKEEPER, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SEAKEEPER, INC. IS PROHIBITED.

NAME	DATE	SEAKEEPER P.O. BOX 999 SOLIDONS, MARYLAND 20698, USA PH: (410) 326-1580 FAX: (410) 326-1199
\$ COS	30JAN08	
CHECKED	30JAN08	MODEL 7000 GYRO MOTOR DRIVE J-BOX ENVELOPE & MOUNTING DETAILS
ENG APPR: J. ADAMS	30JAN08	
COMMENTS:		TITLE MODEL 7000 GYRO MOTOR DRIVE J-BOX ENVELOPE & MOUNTING DETAILS SIZE: DWG NO. 90007 SCALE 1:3 WEIGHT 35 LBS. (15.9 KG) SHEET 1 OF 1
		REV 1