F

Е

D

С

1) THESE COMPONENTS ARE TO BE USED DURING A DIRECT BOLT-IN INSTALLATION OF SEAKEEPER 5/6 TO ANY METAL OR FIBERGLASS SURFACE STRUCTURE IN ACCORDANCE TO THE SEAKEEPER 5/6 GENERIC INSTALLATION GUIDE. THE 4 GASKET PADS MUST BE USED BETWEEN THE ALUMINUM GYRO FRAME SPACERS AND ANY DISSIMILAR METAL STRUCTURE THAT THE GYRO WILL BOLT AGAINST. THE BOLTS SUPPLIED ARE CLASS 10.9 ZINC-NICKEL PLATED ALLOY STEEL, M12-1.75 X 80mm LG. ANY OTHER LENGTH NEEDED MUST BE SUPPLIED BY INSTALLER. SEAKEEPER RECOMMENDS THE USE OF A MODERATE COAT OF MARINE ANTI-SEIZE (E.G., SAF-T-EZE NICKEL GRADE ANTI-SEIZE, SBT-4N OR EQUIVALENT) TO THE THREADS OF EACH BOLT. SEAKEEPER ALSO RECOMMENDS USING A MARINE GRADE SEALANT (E.G., SILI-THANE 803 OR EQUIVALENT) UNDER EACH BOLT HEAD AND WASHER TO HELP PREVENT CORROSION OF BOLTS.

7

5

6


4


PACKAGING INSTRUCTIONS:

8

a) PACKAGE EACH PART NUMBER ITEM IN A BAG AND LABEL EACH BAG WITH PART NUMBER. b) PLACE A COPY OF THE SEAKEEPER 5/6 BOLT-IN CLEARANCES, ITEM #5, INSIDE THE PACKAGING.

c) LABEL THE ENTIRE KIT "90400, SEAKEEPER 6 BOLT-IN KIT".

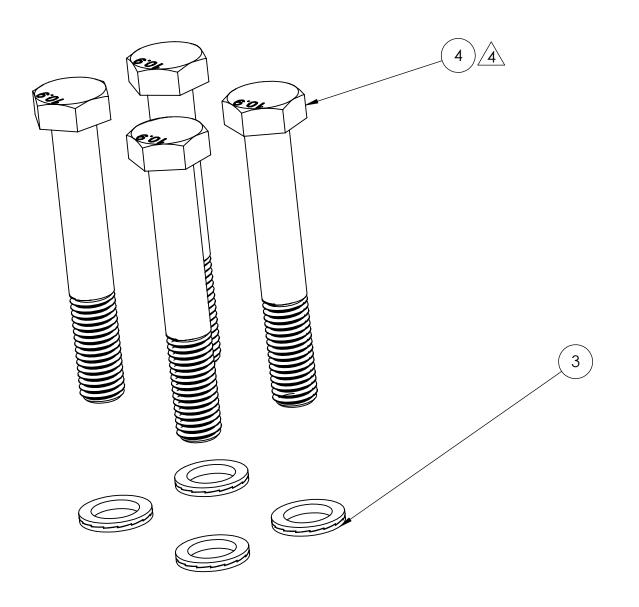

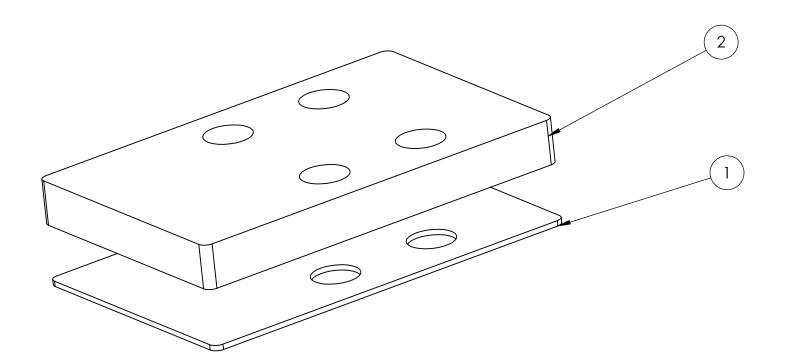

6

7

8

5	90391	SEAKEEPER 5-6 GYRO BOLT-IN CL	earances					1
4	60846	SCREW, HEX HD CAP, M12-1.75 X	CAP, M12-1.75 X 80MM LG, PAR TD, GRD 10.9, Zn-Ni PLTD STL			Zn-Ni PLTD STL		16
3	60844	WASHER, WEDGE LOCK, .511D X .	77 OD (STANDARD (OD), DELTA PROTEKT PLTD S	stl D	elta protekt pltd sti	-	16
2	11241	SK5 FOUNDATION SPACER				6061-T6 (SS)		4
1	11145	SK5 FRAME ISOLATION GASKET).	63 THK GAROLITE G10		4
ITEM NO.	PART NO.		DESCRIPTION			MATERIAL	G	QTY.
			WEIGHT - LBS : MATERIAL: 	WITHOUT THE WRITTEN PERMISSION OF SEAKEEPER IS PROHIBITED. DRAWN: DATE: WHK 01JUL2016		SEAKEEPI SEAKEEPER 5/6 BOLT-I	California, M	

3	

2

REV NO.	ECN NO.	ZONE	DESCRIPTION	DATE	APPRVD.
2	-		REPLACED 60428 WITH 60482	2/14/2019	BRD
3	765		SK5 RELAUNCH	6/28/2019	AVM
4	908		RE-DRAWN, RPL: 60387 W/ 60846, 60482 AND 60252 W/ 60844	8/3/2021	ZGY

1

Е

D

С

