



NOTES:


- 1) PRESSURE SWITCHES ARE TO BE SET AT 72 PSI FALLING ± 2 PSI.
2) REPLACEMENT COIL FOR ITEM 7 IS SEAKEEPER #50267.
3) ITEM 10 TO BE INSTALLED TO ALLOW FREE FLOW FROM ACCUMULATOR INTO MANIFOLD.

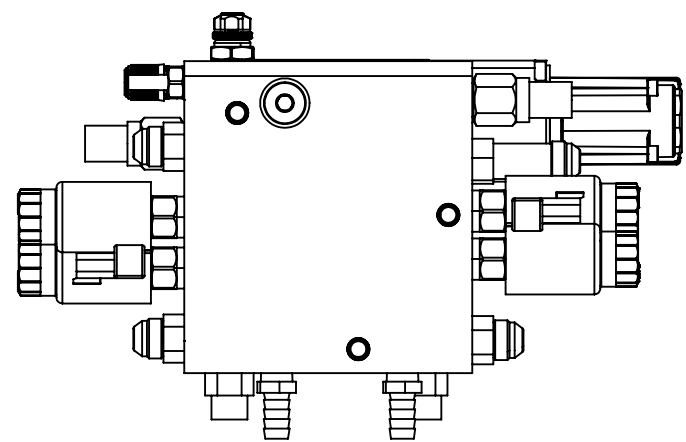


MOUNTING
FACE VIEW

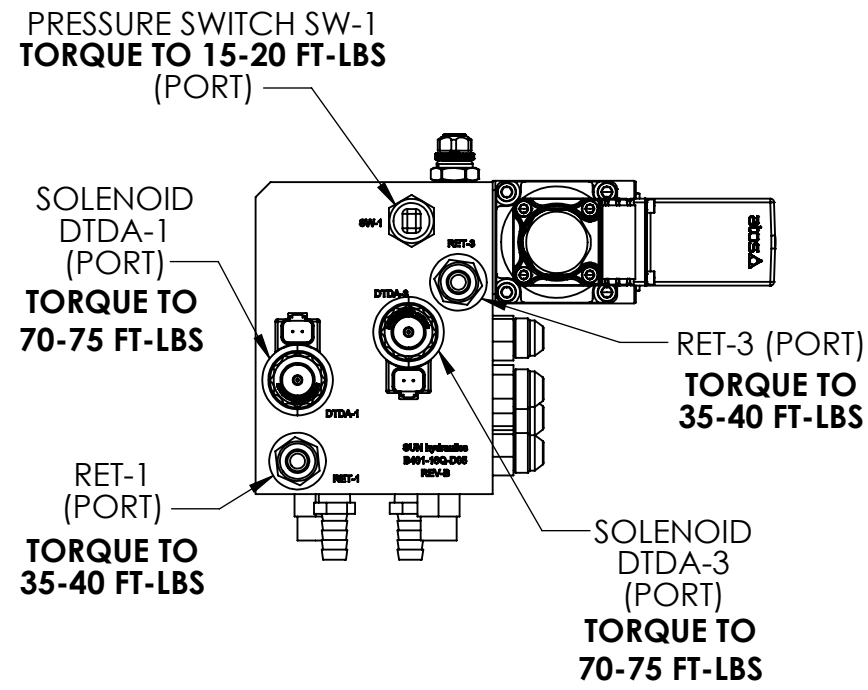


SIDE VIEW

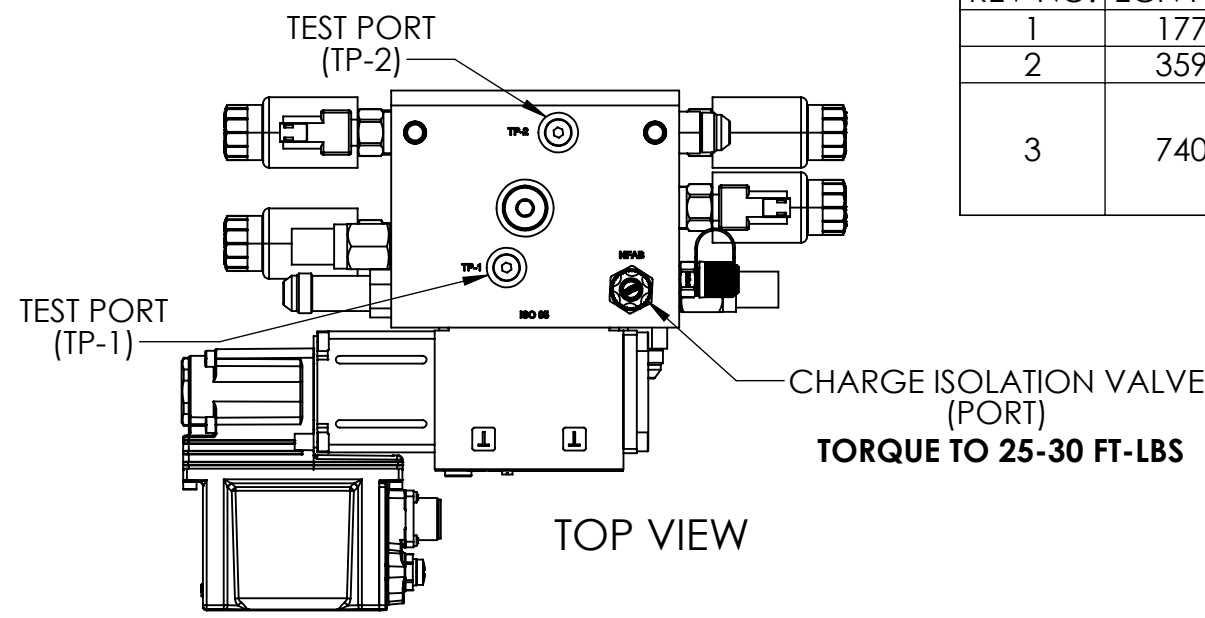


TOP VIEW

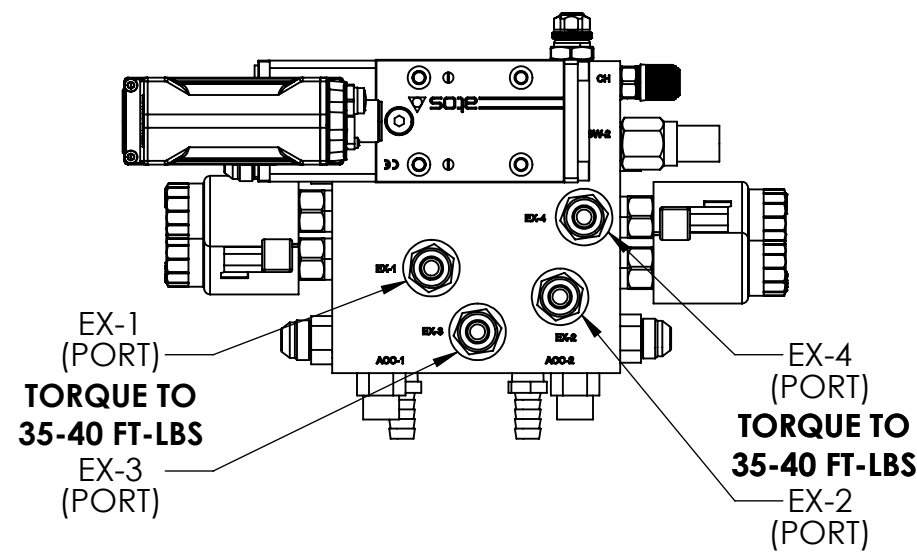


FACE VIEW

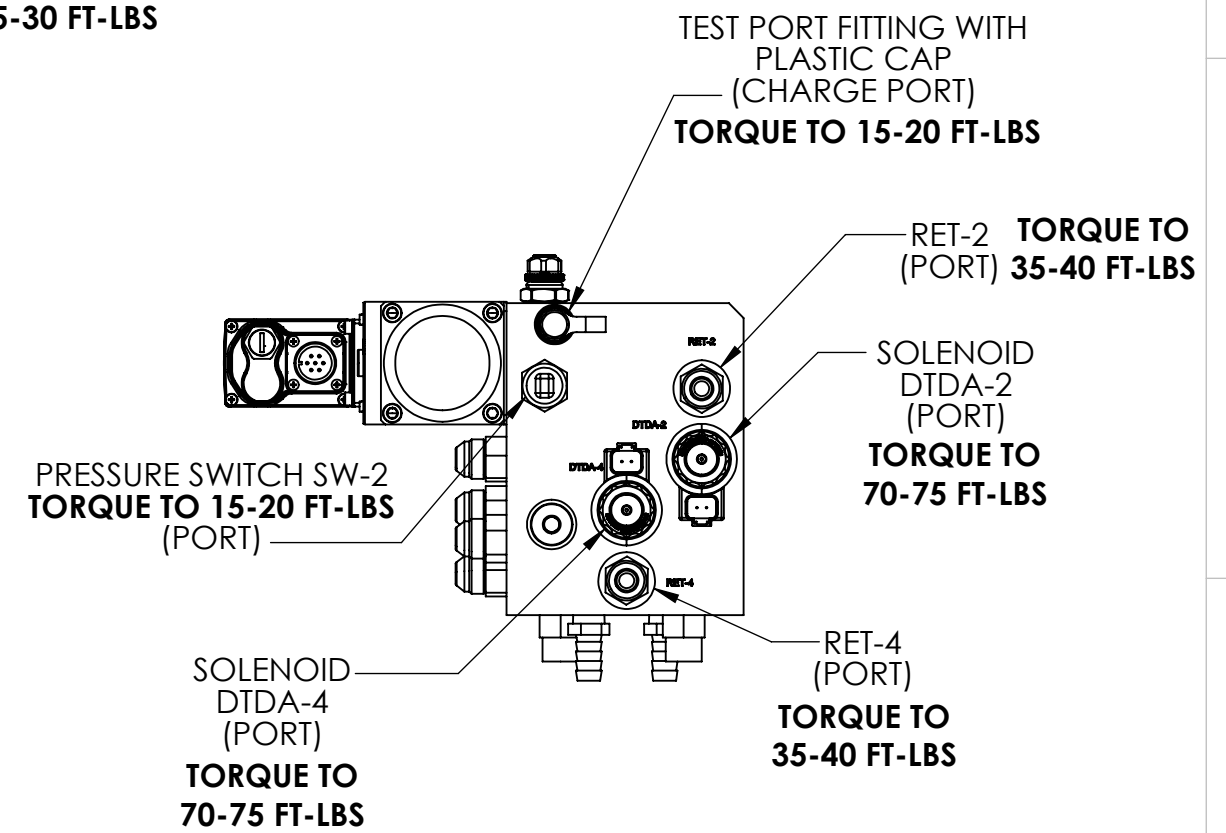


SIDE VIEW

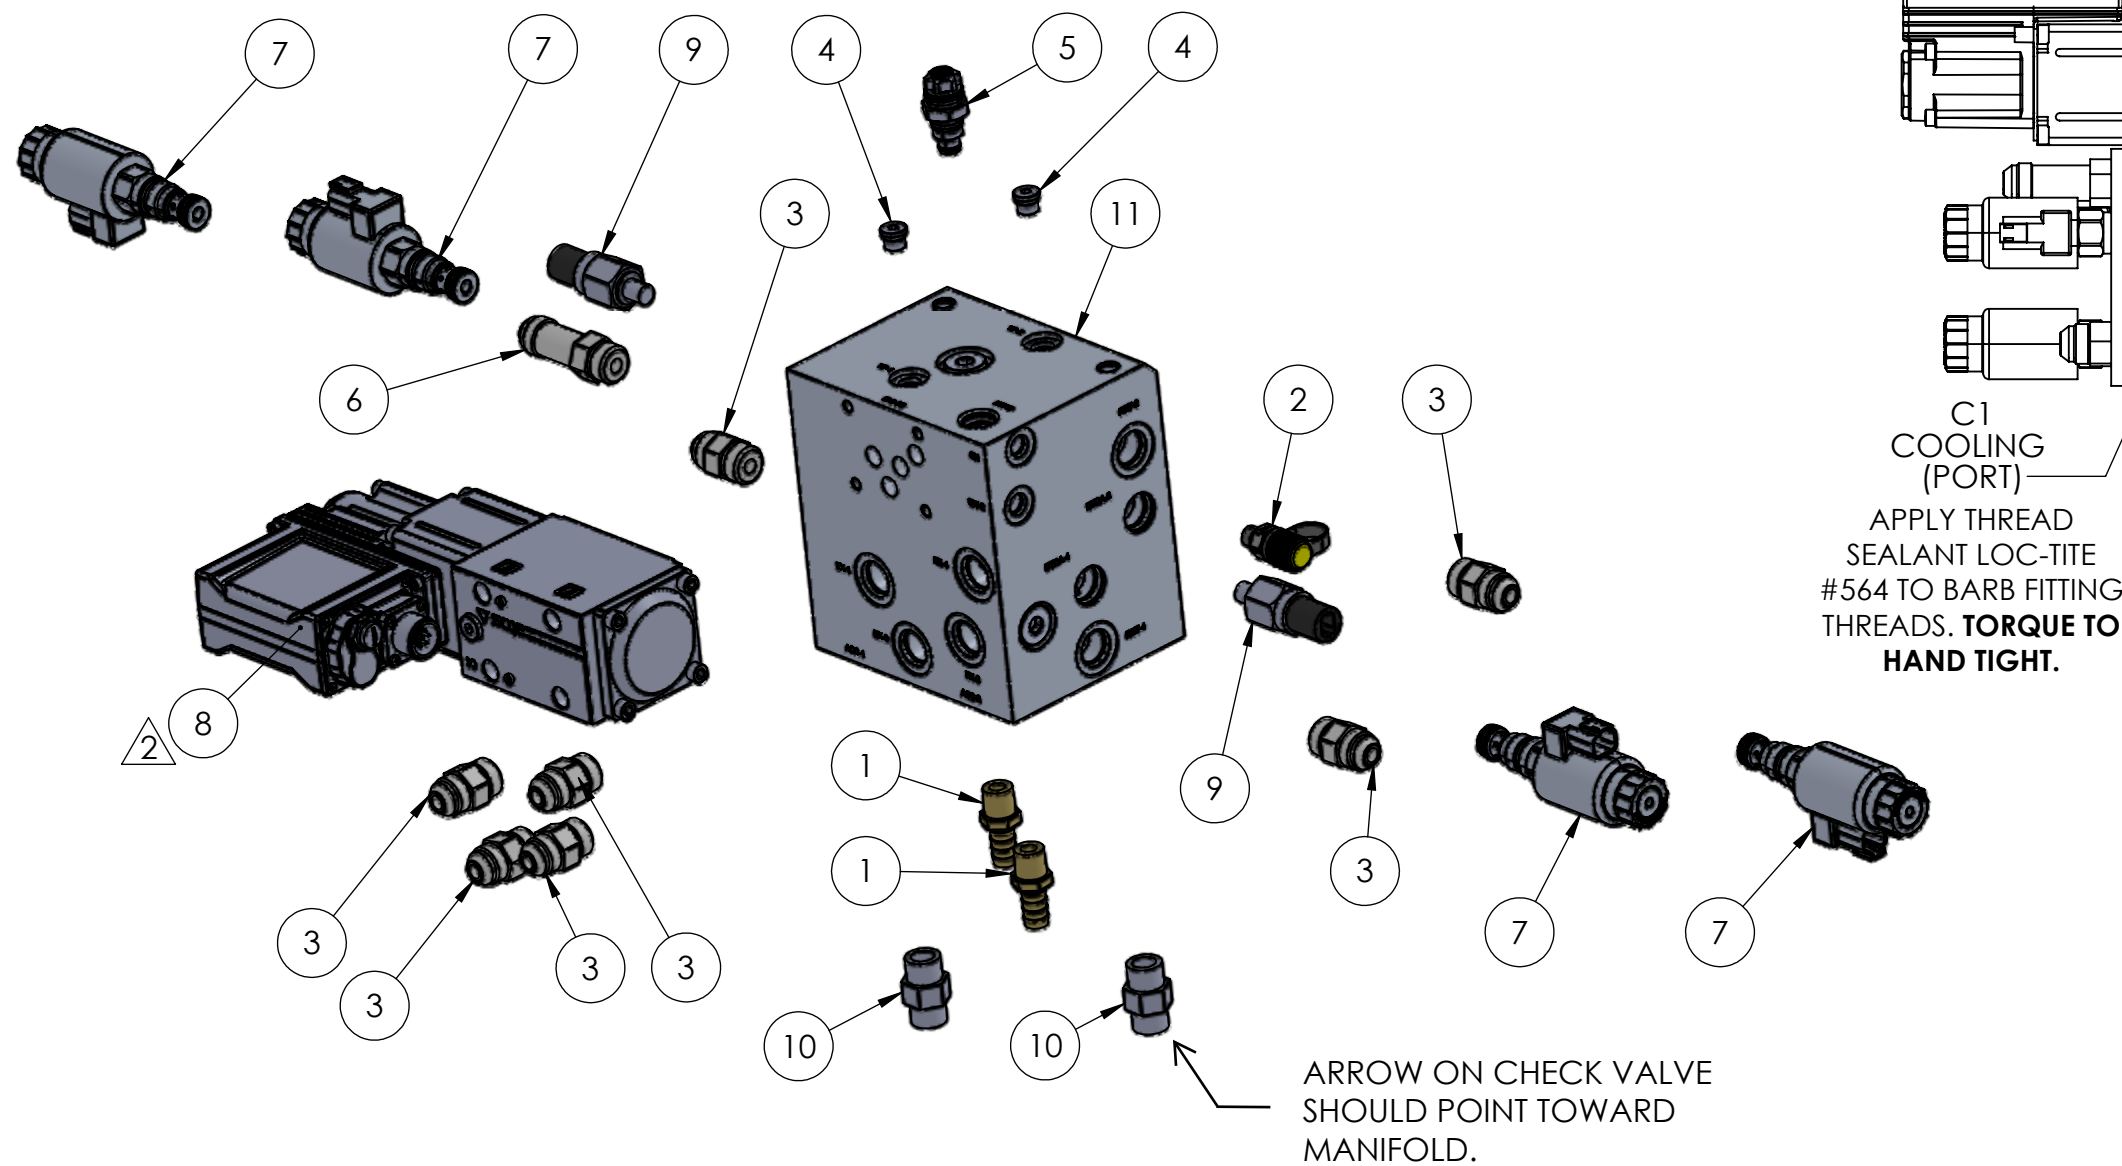

ARROW ON CHECK VALVE
SHOULD POINT TOWARD
MANIFOLD.

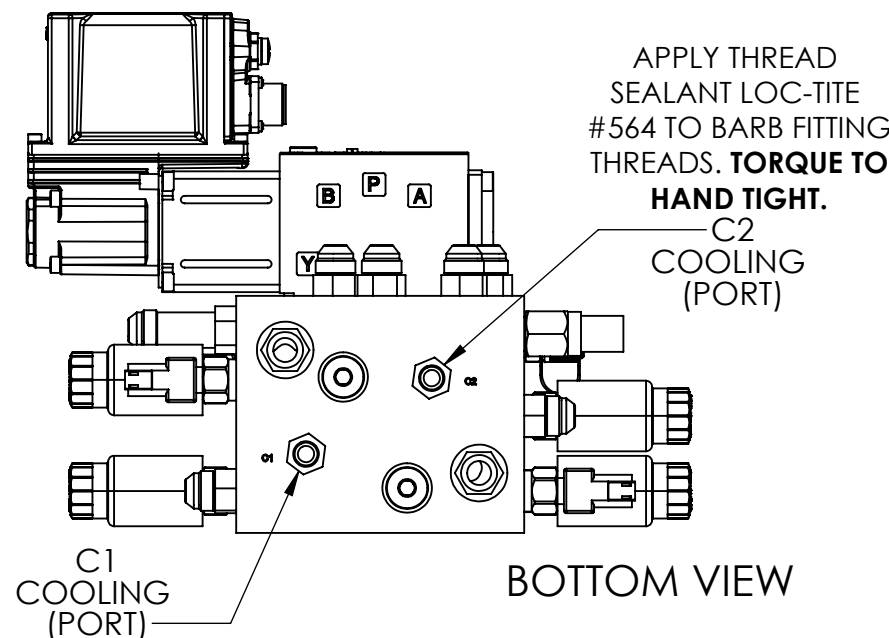

BOTTOM VIEW

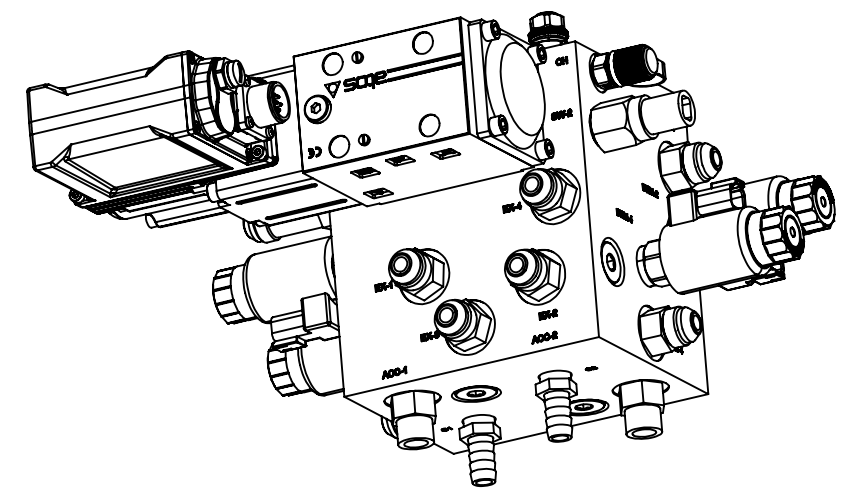

REV NO.	ECN NO.	ZONE	DESCRIPTION	DATE	APPRVD.
1	177		INITIAL RELEASE	14MAY2015	BRD
2	359		REPLACED 50091 WITH 50165.	03FEB2016	BRD
3	740		MANIFOLD CHANGED FROM PAINTED TO ANODIZED. 50289 REPLACED 50118 REMOVED ACCUMULATORS	4/12/2019	BRD

ITEM NO.	PART NO.	DESCRIPTION	MATERIAL	QTY.	NOTE
11	50288	BRAKE MANIFOLD BLOCK, ANODIZED	6061 ALUMINUM	1	
10	50167	-8 SAE ORB ADAPTER FITTING, ORIFICE WITH FREE FLOW CHECK		2	
9	50166	PRESSURE SWITCH, DEUTSCH CONNECTOR, 72 PSI SETPOINT	---	2	
8	50165	PROPORTIONAL VALVE, D05, WITH DIGITAL OBE	---	1	
7	50289	SOLENOID VALVE, 24VDC NORMALLY CLOSED, FLEX ANODIZED COIL	---	4	
6	50081	ADAPTOR, LONG, -8 SAE ORB TO -8 JIC MALE STRT	ZINC PLTD STEEL	1	
5	50055	CHARGE ISOLATION VALVE	304 SS	1	
4	50027	PLUG, HOLLOW HEX, -4 SAE ORB	-	2	
3	50008	ADAPTOR, -8 SAEORB TO -8 JIC MALE STRT	ZINC PLTD STEEL	7	
2	50006	TEST PORT FITTING W/PLASTIC CAP	STEEL/PLASTIC	1	
1	40299	HOSE BARB ADAPTER, 1/2" HOSE ID X 3/8" NPTF MALE	BRASS	2	

WEIGHT - LBS : 42.8
MATERIAL: ---

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SEAKEEPER INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SEAKEEPER IS PROHIBITED.

SEAKEEPER
Seakeeper Inc. 44425 Pecan Court, Suite 151 California, MD 20619

DRAWN: PRA
ENG APPR: BRD
PROD APPR: DATE: 07APR2015

NAME: SEAKEEPER 26, 35, & 40 BRAKE MANIFOLD ASSEMBLY, SERVICE DWG
DWG NUMBER: 11067-SP
REV. NO. 3
SHEET NO. 1 OF 1