


**NOTES:**

- SEAKEEPER 30025, OPERATOR DISPLAY.**
- SPECIFICATIONS**  
 Power Required: (from Controller)  
 Ambient Air Temperature: -20 to 70 degC  
 Cooling: None required within ambient temperature range  
 Weight: .25 lbs (.1 Kg)  
 Ingress Protection: IP 66  
 Integral Cable: 1m Length

- MOUNTING INSTRUCTIONS**  
 Console space required: Approx. 3 W x 3 H inches (76 x 76 mm)  
 Mounting Instructions: Front mount to vessel console panel, 2.125 inch (54mm) hole, with threaded mounting collar.  
 Maximum panel thickness: 1.38 inches (35mm)  
 Minimum panel thickness: .06 inches (1.6mm)

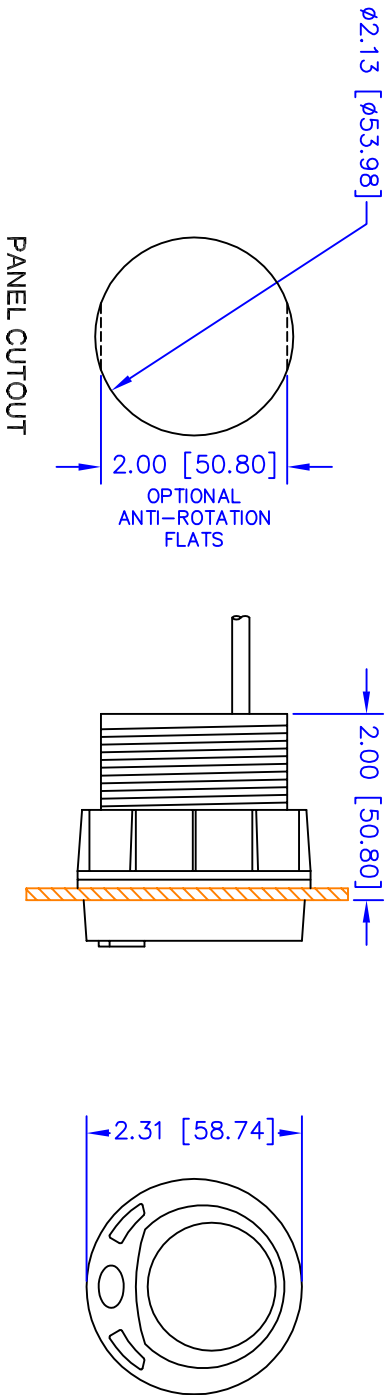

THE INFORMATION CONTAINED  
 IN THIS DRAWING IS THE SOLE  
 PROPERTY OF SEAKEEPER, INC.  
 ANY REPRODUCTION, PART OR  
 AS A WHOLE WITHOUT THE  
 WRITTEN PERMISSION OF  
 SEAKEEPER, INC. IS PROHIBITED.

NAME	DATE
S. COSS	30/JAN/08
J. ADAMS	30/JAN/08

<b>SEAKEEPER</b> P.O. BOX 888 SOLIDONS, MARYLAND 20688, USA PH: (410) 326-1580 FAX: (410) 326-1199	
<b>MODEL 7000 GYRO OPERATOR DISPLAY ENVELOPE &amp; MOUNTING DETAILS</b>	
TITLE MODEL 7000 GYRO OPERATOR DISPLAY ENVELOPE & MOUNTING DETAILS	DRAWN S. COSS
CHECKED J. ADAMS	DATE 30/JAN/08
ENG APPR. J. ADAMS	DATE 30/JAN/08
COMMENTS:	SCALE 1:1
SIZE C	WEIGHT .25 LBS. (.1 KG)
DWG NO. 90009	SHEET 1 OF 1
REV 1	